


四.外形、开口尺寸(宽×高×深)及端子接线图(仅供参考,使用时按机壳的接线图为准)

A型: 96×96×105
开口: 92×92


B型: 48×96×105
开口: 45×92

E型: 80×160×105
开口: 76×152

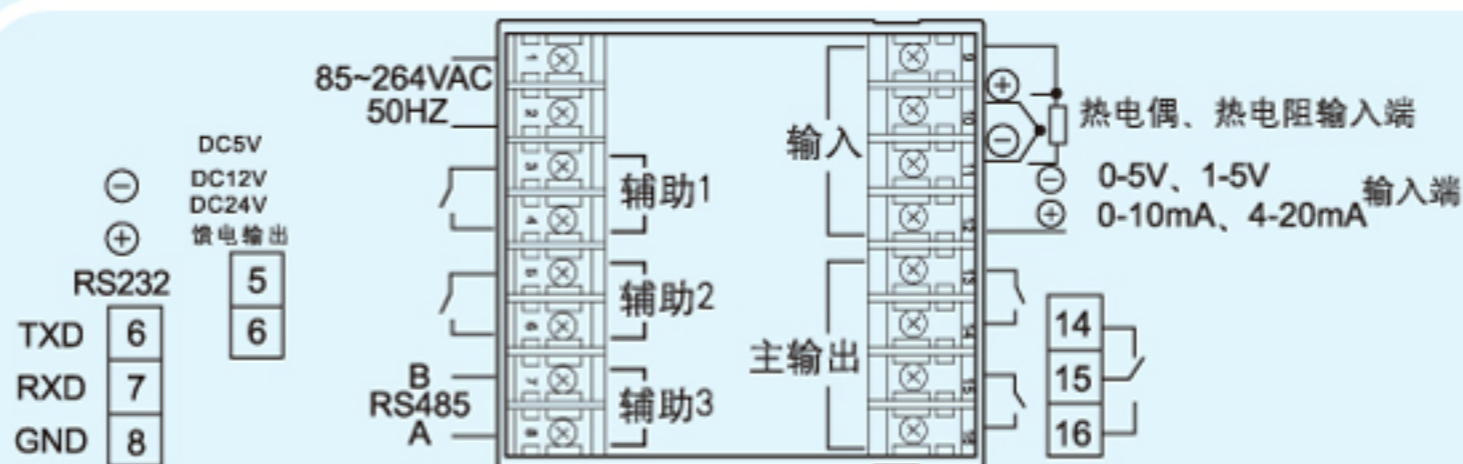


C型: 96×48×105
开口: 92×45


D型: 160×80×105
开口: 152×76

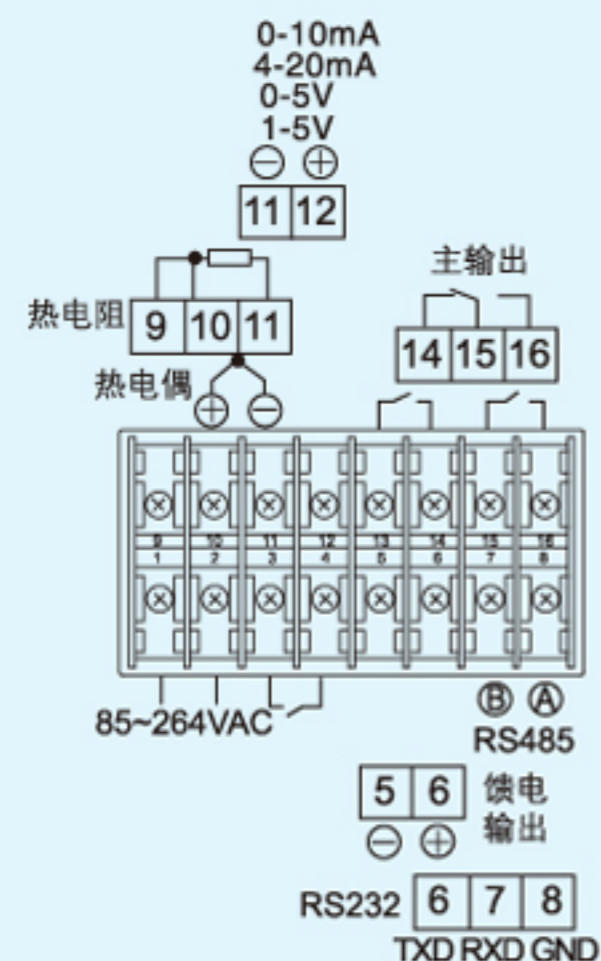

F型: 72×72×105
开口: 68×68

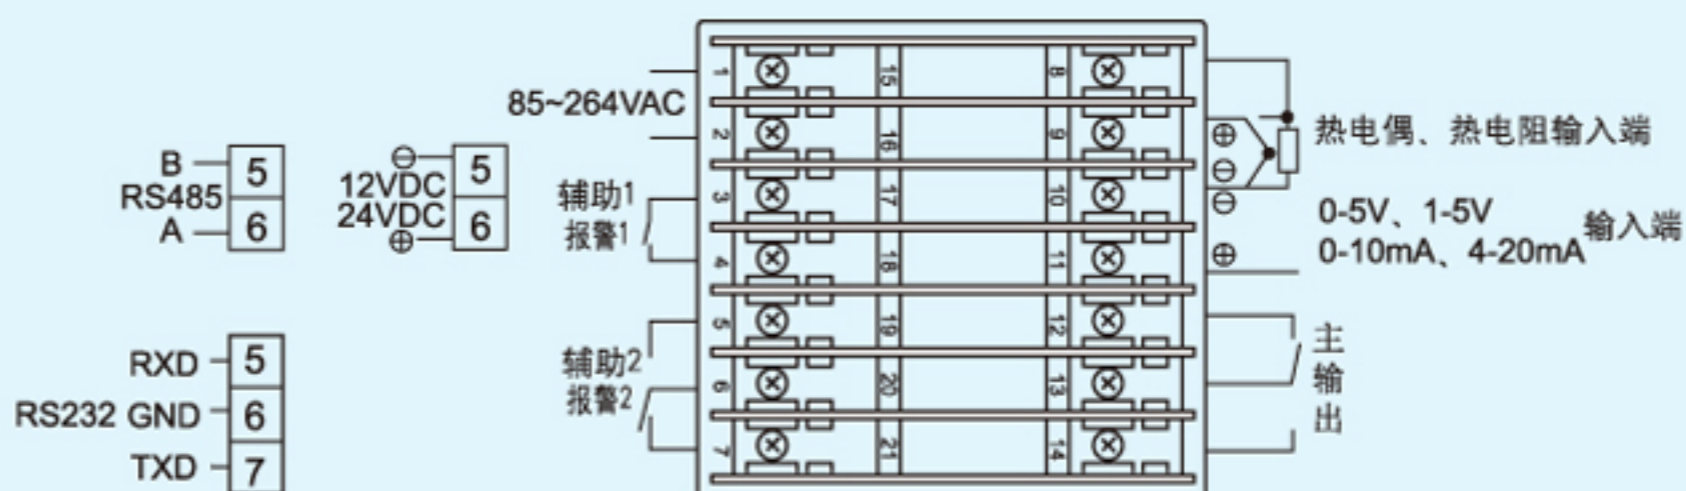

G型: 48×48×100
开口: 44×44

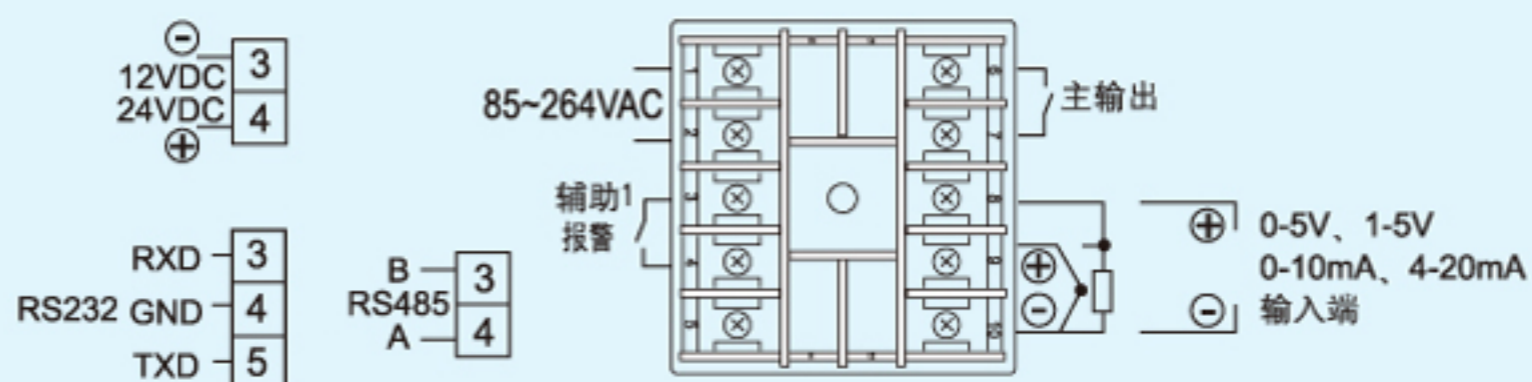

说明:

1. 仪表的输出分为“主控制输出 (OUT)”、“辅助输出1 (AUX1)”、“辅助输出2 (AUX2)”三个部分。端子功能有多重定义, 由该位置所安装的输出接口模块的功能确定; 实际接线应以绿点标志为准。
2. 如订货时没有说明, 仪表线性输入出厂状态为0-5V和1-5V电压, 如果实际输入信号是0-10mA或4-20mA电流, 可在输入端并接一只500Ω或250Ω精密电阻。